



**FN** | **para-fix**  
room divider

**FN** since 1650  
NEUHOFER®  
WE. KNOW. WOW!




## FN | para-fix room divider

### The permanently installed room divider

How can rooms be divided in no time at all while adding stylish accents to the interior design? **The solution: FN para-fix – quick to install, attractive to look at.**

The MDF elements – available in anthracite, white or oak finishes – are simply installed between the floor and ceiling. Closed slats provide more peace and privacy, while open slats allow more light and life to enter. **In short: FN para-fix divides rooms and combines design with functionality.**

#### Lamellas:

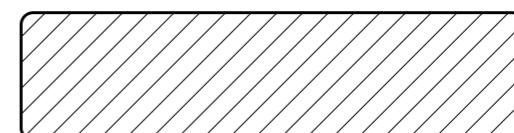

- Colours: anthracite / white / oak
- 4-sided coated MDF
- Dimensions: 22 x 88 x 2670 mm
- Packaging: loose with label

#### Advantages:

- Practical mounting kit for three rotating slats.
- The block-shaped part on the ceiling provides space for the slats to expand and contract due to moisture differences.
- Easy to install.
- Compatible with underfloor heating thanks to the glued-on base plate.
- Alternatively, simple mounting brackets are available for fixed installation.

#### Colours:



Oak

Anthracite


White

# FN para-fix

Turn around

## Assembly:

- To assemble, screw the PT1 parts securely to both ends of the MDF slats. Then decide on a suitable location in the room and, after clipping the PT3 rack into the PT2 body, screw the PT2 body to the ceiling. Connect additional PT2 parts depending on how wide you want the room divider to be. Directly below, glue the PT4 part in place (using double-sided adhesive tape on the back) or screw it in place (only if there is no underfloor heating). Then thread the slats one by one into the block mounted above and snap them into place at the bottom of the floor section. Then connect the three slats with the PT5 coupling rod by clipping them together.
- Total width of an element: 280 mm
- Accessories packaged in a set with screws, suitable for 3 slats each.

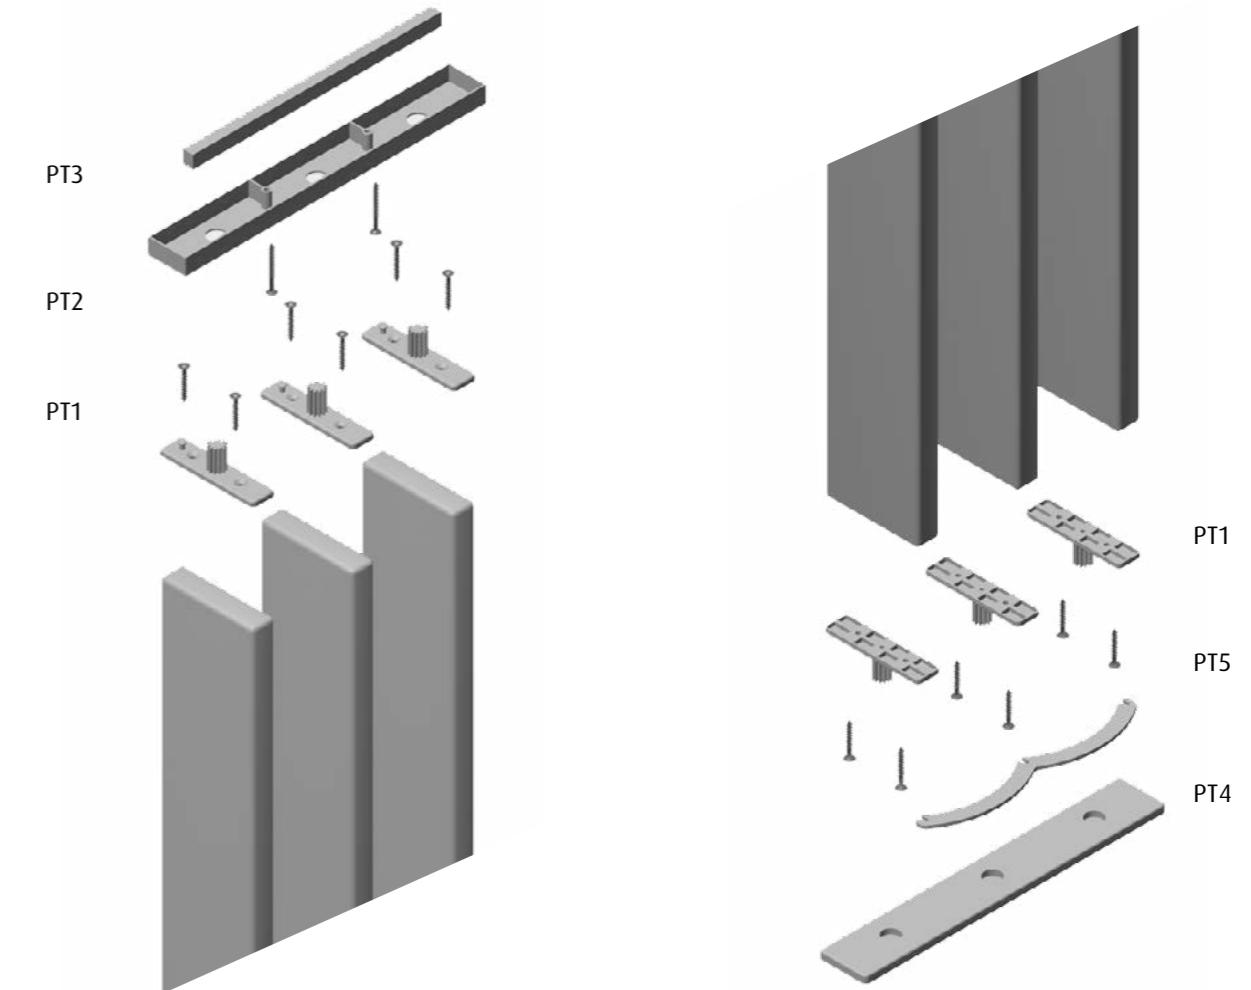

# FN | para-fix



fixed

## Assembly:

For installation, the brackets are mounted on the floor and ceiling at the desired intervals and at the desired angle of the slats to each other. Ensure correct alignment. Then insert the slats.

During installation, ensure that the slats have 2-3 mm of space at the top so that they can adjust in length in response to humidity differences in the room.

The brackets are equipped with slotted holes to enable this. Therefore, only screw the slats to the bracket at the top so that they can expand or shrink.

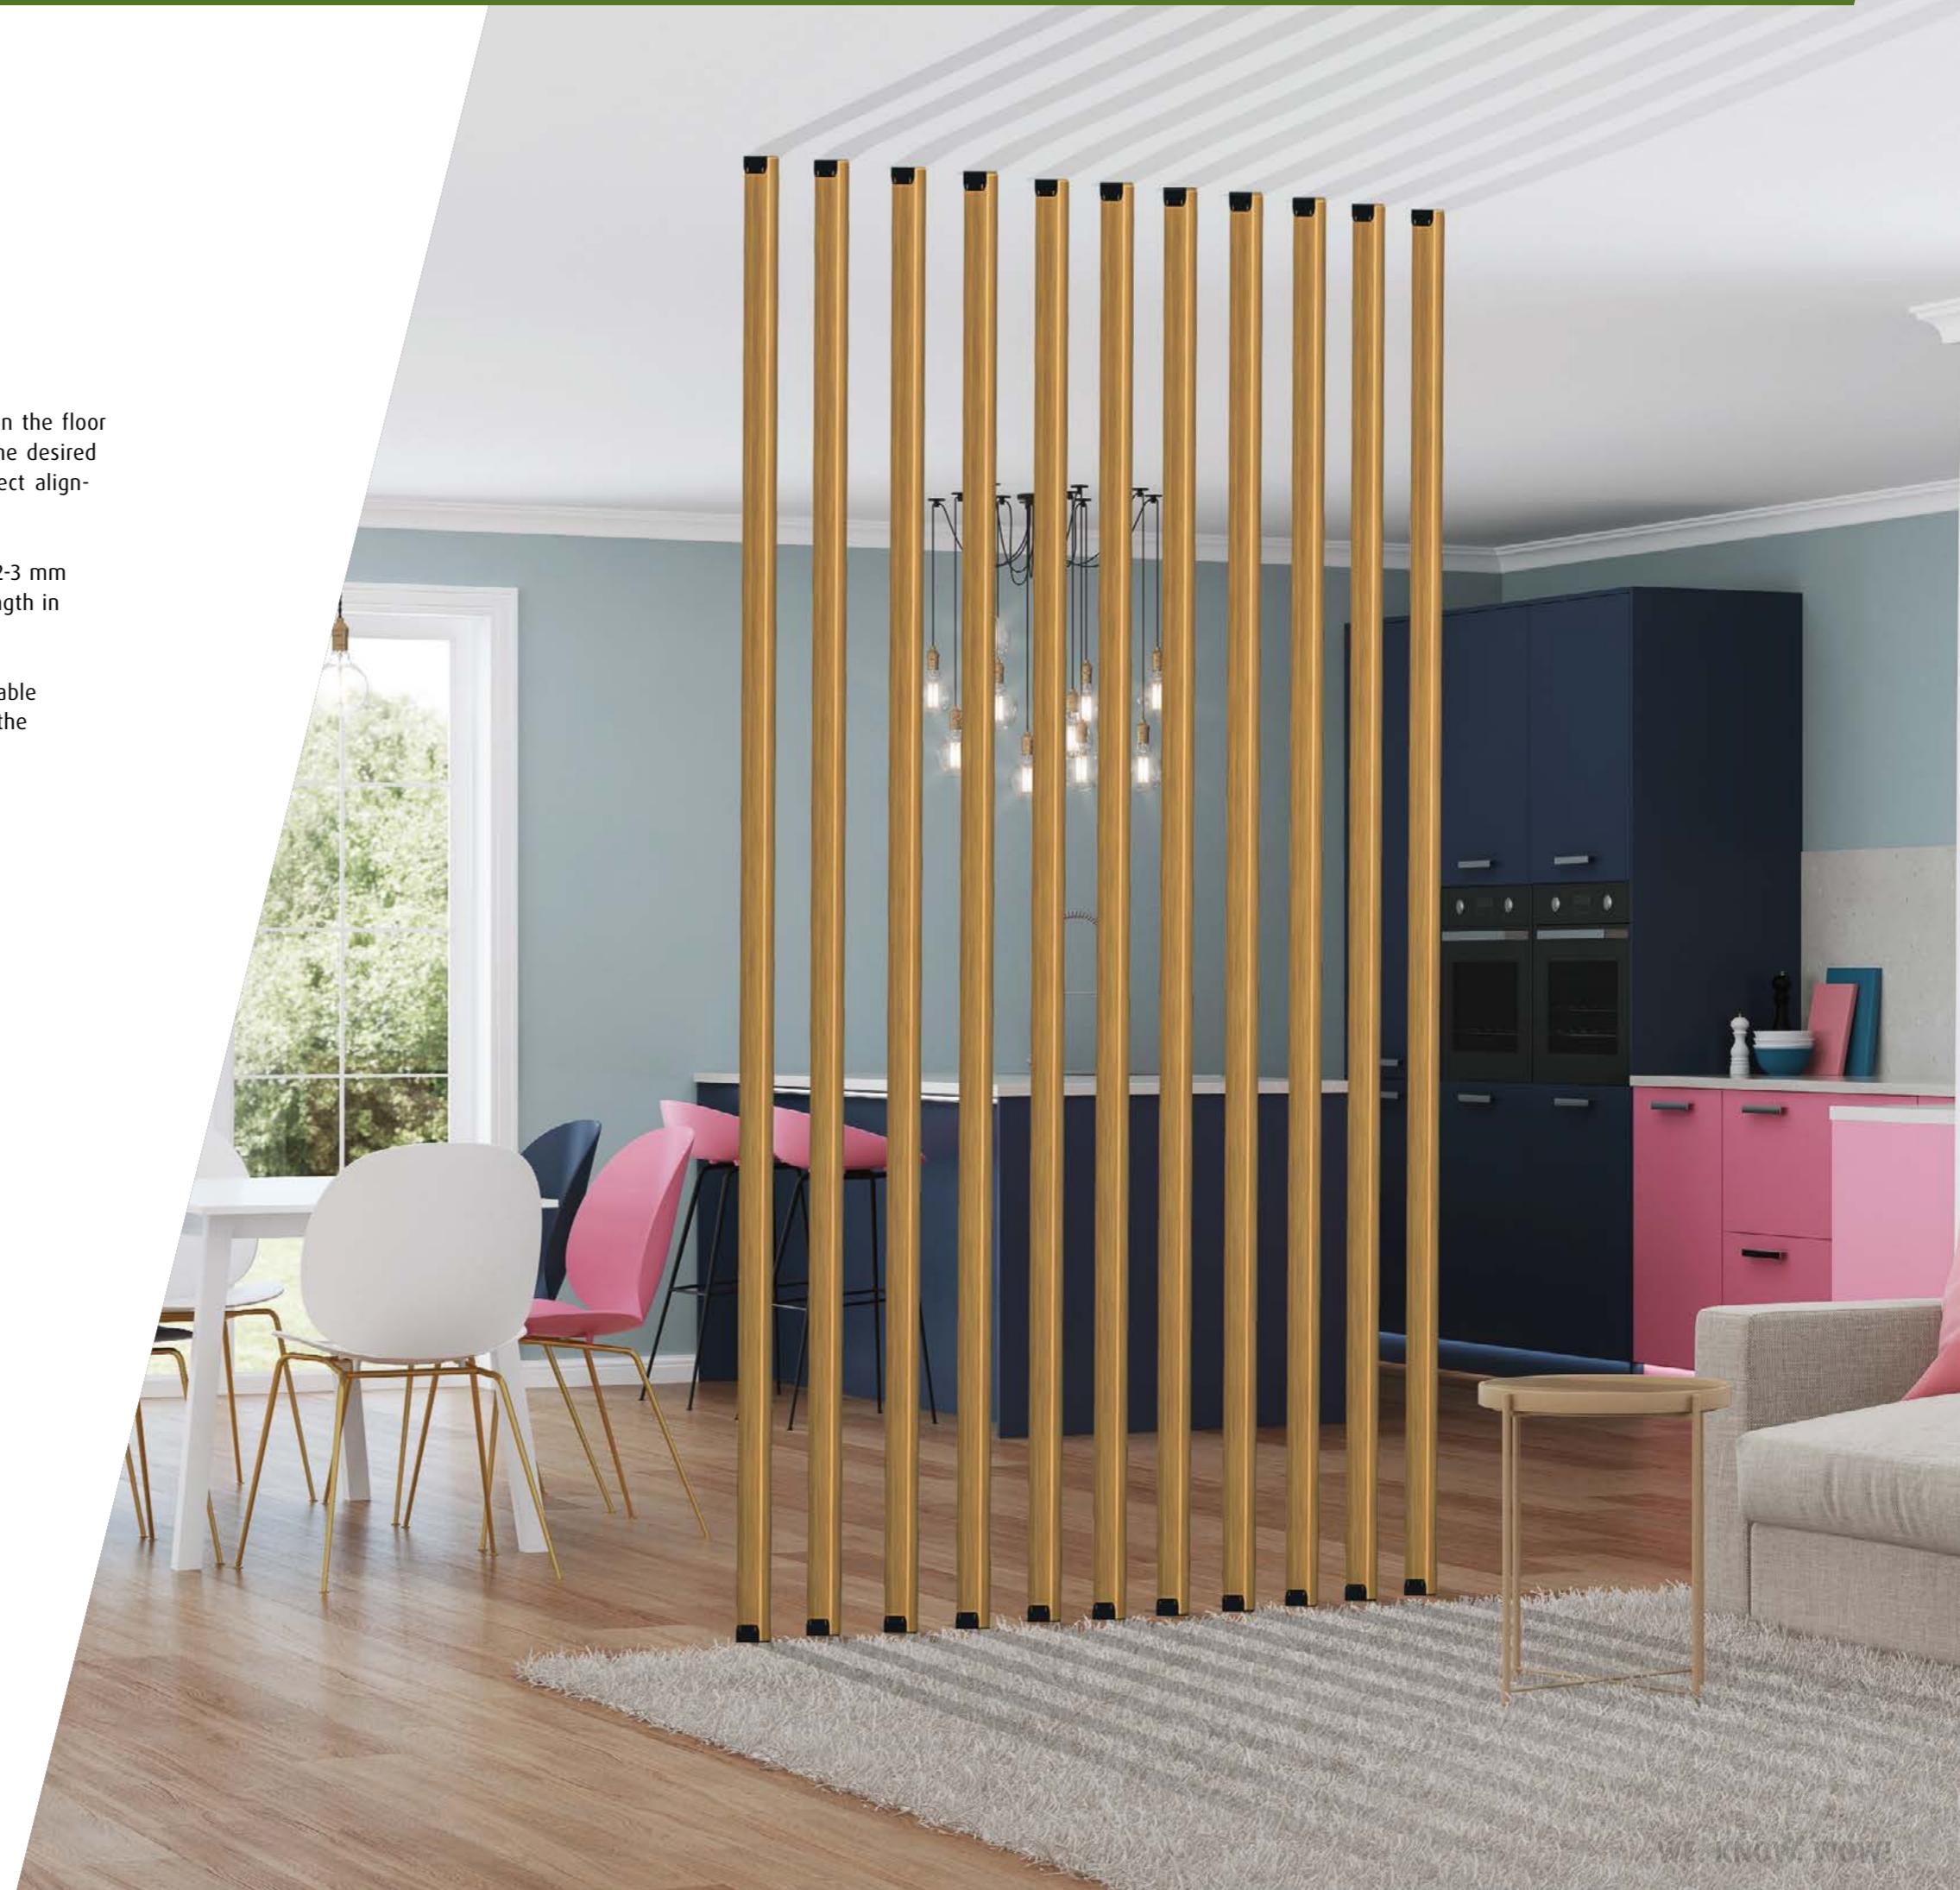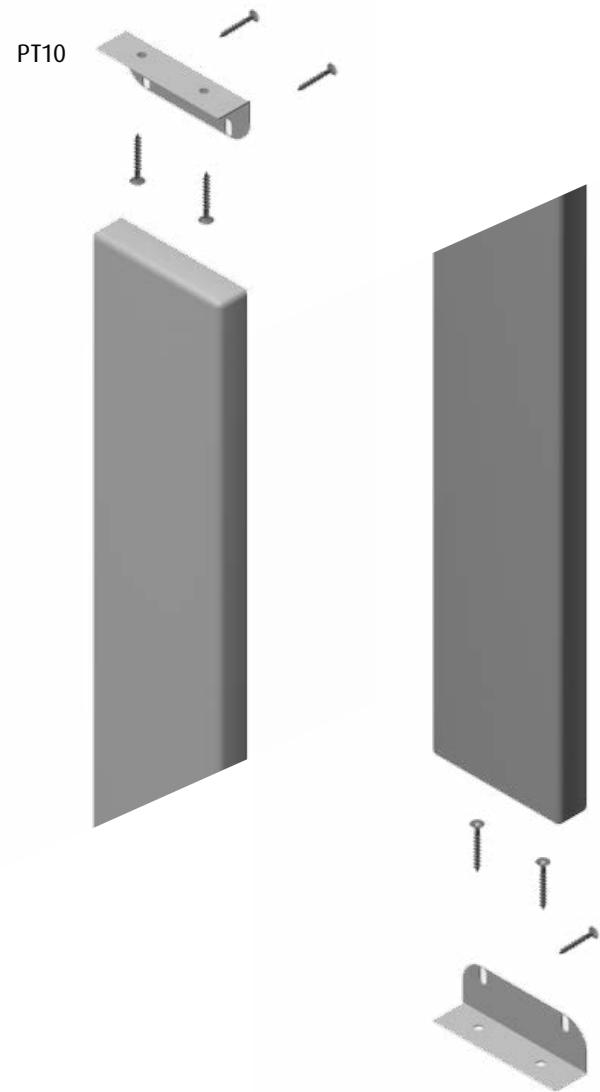



**NEUHOFER**

**WE. KNOW. WOW!**



Plant Zell am Moos – Head Office AT

Plant Pöndorf AT

Plant Mullins/SC USA

All dimensions and performance of the products stated in the product catalogue are to be regarded as approximate. The stated dimensions and performance of the products are non-binding; this applies in particular to their quality, colour and design (grain, surface, etc.). Furthermore, we expressly reserve the right to make any deviations from the products shown in the product catalogue; the offer and order confirmation are exclusively authoritative, based on the General Terms and Conditions (see <https://www.fnprofile.com/de/verkaufs-und-lieferbedingungen-01-01-2022.html>). The customer can therefore derive no rights - of any kind whatsoever - from pictorial representations and/or specified dimensions and services in accordance with this product catalogue.

Printing and typesetting errors and mistakes excepted. 01/26

NEUHOFER HOLZ GMBH

A-4893 Zell am Moos, Haslau 56, Tel.: +43 (0)6234/8500-0,  
office@fnprofile.com, www.fnprofile.com



Here you can find our social media channels



certified  
according to  
ISO 9001/14001



The mark of  
responsible forestry